



The Optiva OTS-2 C-Band transmitter and receiver are ideal to construct downlink 3.400 to 4.200 GHz and uplink 5.845 to 6.725 GHz transparent fiber optic links for antenna remoting, electronic warfare systems, broadband delay lines, signal processing systems and other high-dynamic-range applications.



Optiva satellite and microwave transmitters and receivers are SNMP compliant. They can be housed in the same chassis and monitored by the same Network Management System (NMS) as other Optiva cards to support transport of multiple signal formats and frequency bands in a single flexible platform.

Applications

- Satcom C-Band Antenna Signal Distribution
- Ground Terminal & Intra-Facility Links
- Site Diversity Systems
- Electronic Warfare (EW) Systems
- Broadband Delay Line and Signal Processing Systems

Features / Benefits

- C-Band Uplink and Downlink - Eliminates the performance and cost penalty of block up/down conversion
- Low RIN Source Laser - Provides high-dynamic-range of $>102 \text{ dB Hz}^{2/3}$
- Microprocessor-Based Transmitter Control for Laser Bias, Modulator Bias & Link Gain - Provides consistent high performance operation and allows for modulator low-bias operation and SFDR $>102 \text{ dB Hz}^{2/3}$
- Compatible with EMCORE's Modular Optiva Platform - Allows multiple format and frequency transport in a single chassis
- DWDM Operation - Increases transport capacity without increasing fiber count


System Design

The Optiva platform includes a wide range fiber optic transport products for satellite and microwave communications from 1 MHz to 40 GHz. These units can be used to construct transparent inter- and intra-facility links for RF and microwave signal transport, antenna remoting, electronic warfare systems and other high-dynamic-range applications.

optiva | PLATFORM

Optiva is a completely modular, hot-swappable platform. Both 19" rack-mount and compact tabletop, or wall-mountable enclosures are available. The 3 RU 19" rack-mount, fan-cooled enclosures Model OT-CC-16F can support up to 16 insert cards and utilize two dual-redundant, hot-swappable, 200 watt power supplies. The 1 RU 19" rack-mount, fan-cooled enclosure Model: OT-CC-6-1U can accommodate 6 insert cards and utilizes two hot-swappable 60 watt power supplies. Compact two-slot OT-DTCR-2 enclosures are also available that use an external wall-mount power supply.

Block Diagram

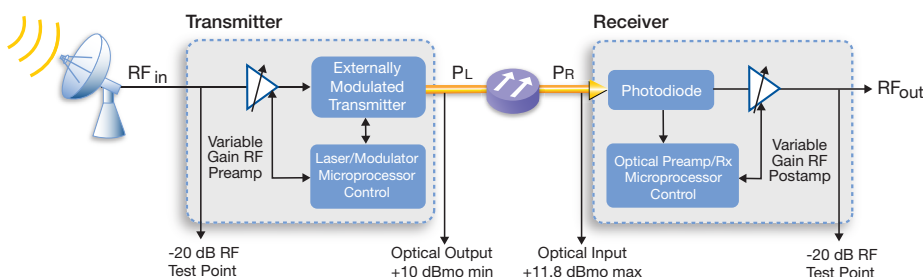

Optiva OTS-2 C-Band RF Fiber Optic Links

emcore®

DATASHEET | JULY 2017

SATCOM

Performance Highlights

Parameter	Min	Typical	Max	Units
Frequency Range	3.400 5.845	- -	4.200 6.725	GHz GHz
RF Input Power	-	-	5* -15^	dBm
Wavelength	-	1550	-	nm
Optical Output Power	9	10	11	dBm
Operating Temperature Range	-10	-	50	°C

*Tx: RF amp 15 dB gain, attenuation range 0 to 15 dB

^Tx: RF amp 35 dB gain, attenuation range 0 to 15 dB

Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of the datasheet. Exposure to absolute maximum ratings for extended periods can adversely affect device reliability.

Parameter	Symbol	Min	Max	Units
Operating Temperature	T _{OP}	-20	60	°C
Storage Temperature	T _{STG}	-40	85	°C
RF Input	S _{in}	NA	5* -15^	dBm


*Tx: RF amp 15 dB gain

^Tx: RF amp 35 dB gain


Environmental Specifications

Parameter	Symbol	Min	Max	Units
Operating Temperature	T _{OP}	-10	50	°C
Operating Humidity, Maximum Non-Condensing	--	--	95%	--
Operating Altitude, Above Sea Level	--	--	6000 1828.8	ft m
Storage Temperature	T _{STG}	-40	70	°C
Storage Humidity, Maximum Non-Condensing	--	--	95%	--
Storage Altitude, Above Sea Level	--	--	50,000 15,240	ft m


Typical C-Band Downlink S21 Frequency Response

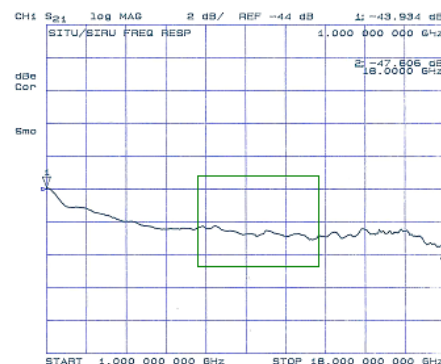

Typical C-Band Uplink S21 Frequency Response

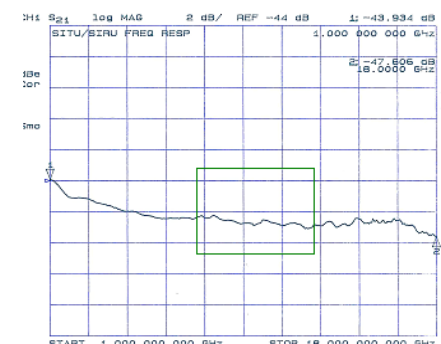

Enclosure Options

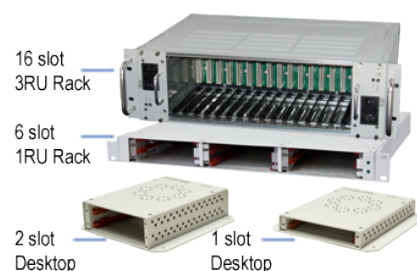

Transmitter & Receiver Optical Characteristics

Parameter	Symbol	Condition	Min	Typical	Max	Units
Wavelength	λ	-	1530	1550	1562	nm
Optical Output Power	P_L	-	9	10	11	dBm
Connector Return Loss	-	-	40	-	-	dB
Optical Connector Type	-	SC/APC	-	-	-	-
Receiver Optical Input Power	P_{in}	-	-	-	+10	dBm
Receiver Responsivity	-	-	0.7	-	-	A/W

Note: In order to prevent reflection-induced distortion degradation, the laser should be connected to an optical cable having a return loss of at least 55 dB for discrete reflections and 30 dB for distributed reflections.

C-Band Transmitter & Receiver RF Characteristics

Parameter	Condition	Min	Typical	Max	Units
Operational Bandwidth	-	3.400 5.845	- -	4.200 6.725	GHz GHz
RF Input Impedance	-	-	50	-	Ω
RF Return Loss	-	-	-	-15	dB
RF Connectors	3.5 mm				
RF Test Point Reference Value, Relative to RF input or RF output*	-	-18	-20	-22	dB

*Test point performance beyond the stated frequency range is provided; only the test point reference value tolerance may increase beyond the above stated +/- 1 dB

DC Power Consumption - Max

Module Type	Input Voltage (VDC)	Max Current (@+70°C)
Transmitter	+12	1 A
Receiver	+12	750 mA

Link Performance - C-Band Downlink

Parameter	Symbol	Condition	Min	Typical	Max	Units
RF Bandwidth	-	-	3.400	-	4.200	GHz
Link Gain (+0 dBm Rx optical input)*^	G	@ 3.400 GHz	0	4	-	dB
	G	@ 4.200 GHz	0	4	-	dB
Link Gain (+10 dBm Rx optical input)*^	G	@ 3.400 GHz	20	24	-	dB
	G	@ 4.200 GHz	20	24	-	dB
Noise Figure (+0 dBm Rx optical input)^	NF	@ 3.400 GHz	23	-	-	dB
	NF	@ 4.200 GHz	23	-	-	dB
Noise Figure (+10 dBm Rx optical input)^	NF	@ 3.400 GHz	13	-	-	dB
	NF	@ 4.200 GHz	13	-	-	dB
Input IP3^	IIP3	@ 3.400 GHz	-	-6	-	dBm
	IIP3	@ 4.200 GHz	-	-5	-	dBm
Spurious Free Dynamic Range^	SFDR	@ 0 dBm Rx Optical Input	97	-	-	dB-Hz ^{2/3}
	SFDR	@ +10 dBm Rx Optical Input	101	-	-	dB-Hz ^{2/3}
Gain Variation	-	Any 36 MHz	-	-	0.7	dB
	-	Any 500 MHz	-	-	1.5	dB

*Receiver RF output will change 2 dB for each 1 dB of Rx optical input power level change

^Performance based on OTS-2T/S5 with RF Amp gain of 35 dB, OTS-2R/S5 with RF Amp gain of 15 dB

Link Performance - C-Band Uplink

Parameter	Symbol	Condition	Min	Typical	Max	Units
RF Bandwidth	-	-	5.845	-	6.725	GHz
Link Gain (+0 dBm Rx optical input)*^	G	@ 5.845 GHz	-2	2	-	dB
	G	@ 6.725 GHz	-2	2	-	dB
Link Gain (+10 dBm Rx optical input)*^	G	@ 5.845 GHz	18	22	-	dB
	G	@ 6.725 GHz	18	22	-	dB
Noise Figure (+0 dBm Rx optical input)^	NF	@ 5.845 GHz	23	-	-	dB
	NF	@ 6.725 GHz	23	-	-	dB
Noise Figure (+10 dBm Rx optical input)^	NF	@ 5.845 GHz	13	-	-	dB
	NF	@ 6.725 GHz	13	-	-	dB
Input IP3^	IIP3	@ 5.845 GHz	-	-6	-	dBm
	IIP3	@ 6.725 GHz	-	-5	-	dBm
Spurious Free Dynamic Range^	SFDR	@ 0 dBm Rx Optical Input	97	-	--	dB-Hz ^{2/3}
	SFDR	@ +10 dBm Rx Optical Input	101	-	--	dB-Hz ^{2/3}
Gain Variation	-	Any 36 MHz	-	-	0.7	dB P-P
	-	Any 500 MHz	-	-	1.5	dB P-P

*Receiver RF output will change 2 dB for each 1 dB of RX optical input power level change

^Performance based on OTS-2T/S5 with RF Amp gain of 35 dB, OTS-2R/S5 with RF Amp gain of 15 dB

Ordering Information: Transmitter

Transmitter

OTS-2T / 3.5-*VVVV*-*WW*-10-*XX*-12-*YY*-*Z*

- When ordering replace "VVVV" with one of the C-Band Frequency Options
- When ordering replace "WW" with one of the ITU Channel Options
- When ordering replace "XX" with one of the Optical Connector Options
- When ordering replace "YY" with one of the Variable Gain RF Amplifier Options
- When ordering replace "Z" with one of the Enclosure Options

C-Band Frequency Options (GHz) "VVVV"	ITU Channel Options (THz / nm) "WW"	Optical Connector Options "XX"	Variable Gain RF Amplifier Options (dB) "YY"	Enclosure Options "Z"
3442 = 3.400-4.200 GHz	Standard:	SA = SC / APC	15 = 15 dB	1 = Optiva Indoor Rack-Mount Installation
5867 = 5.845-6.725 GHz	00 = non-ITU: 1520-1580 nm	FA = FC / APC	35 = 35 dB	
	Optional:	EA = E2000 / APC		2 = Optiva Outdoor Mini-Hub Installation
	22 = 192.2 THz/1559.79 nm			
	23 = 192.3 THz/1558.98 nm			
	24 = 192.4 THz/1558.17 nm			
	25 = 192.5 THz/1557.36 nm			
	26 = 192.6 THz/1556.56 nm			
	27 = 192.7 THz/1555.75 nm			
	28 = 192.8 THz/1554.94 nm			
	29 = 192.9 THz/1554.13 nm			
	30 = 193 THz/1553.33 nm			
	31 = 193.1 THz/1552.52 nm			
	32 = 193.2 THz/1551.72 nm			
	33 = 193.3 THz/1550.92 nm			
	34 = 193.4 THz/1550.12 nm			
	35 = 193.5 THz/1549.32 nm			
	36 = 193.6 THz/1548.51 nm			
	37 = 193.7 THz/1547.72 nm			

Ordering Information: Receiver

Receiver


OTS-2R / 3.5-*WWWW*-10-*XX*-00-2-*YY*-*Z*

- When ordering replace "WWWW" with one of the C-Band Frequency Options
- When ordering replace "WW" with one of the Optical Connector Options
- When ordering replace "YY" with one of the Variable Gain RF Amplifier Options
- When ordering replace "Z" with one of the Enclosure Options

C-Band Frequency Options (GHz) "WWWW"	Optical Connector Options "XX"	Variable Gain RF Amplifier Options (dB) "YY"	Enclosure Options "Z"
3442 = 3.400-4.200 GHz Uplink	SA = SC / APC	15 = 15 dB	1 = Optiva Indoor Rack-Mount Installation
	FA = FC / APC		
	EA = E2000 / APC	35 = 35 dB	2 = Optiva Outdoor Mini-Hub Installation
5867 = 5.845-6.725 GHz Downlink			

Mechanical Configuration

Each Transmitter and Receiver module occupies two slots in the EMCORE Optiva Chassis.

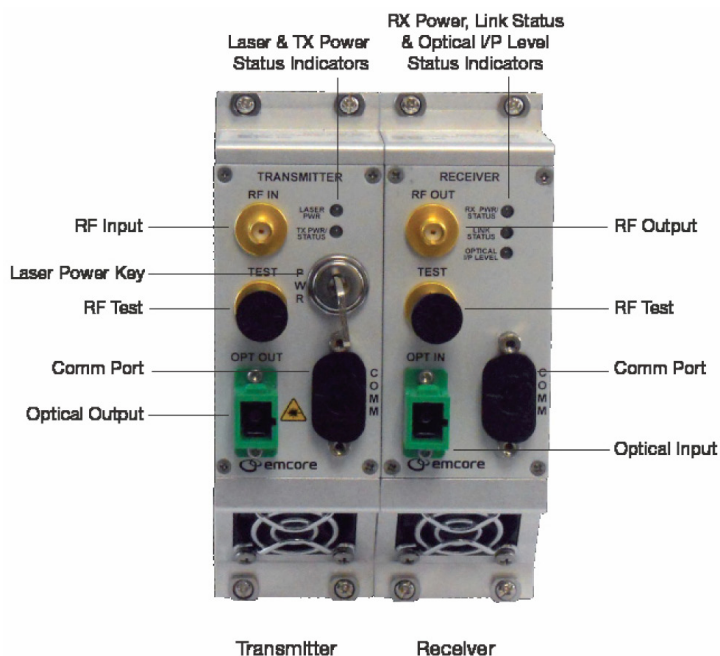


Laser Safety

This product meets the appropriate standard in Title 21 of the Code of Federal Regulations (CFR). FDA/CDRH Class 1M laser product. All versions of this laser are Class 1M laser product, tested according to IEC 60825-1:2007 / EN 60825-1:2007. An additional warning for Class 1M laser products. For diverging beams, this warning shall state that viewing the laser output with certain optical instruments (for example: eye loupes, magnifiers, and microscopes) within a distance of 100 mm may pose an eye hazard. For collimated beams, this warning shall state that viewing the laser output with certain instruments designed for use at a distance (for example: telescopes and binoculars) may pose an eye hazard.

Wavelength = 1.3/1.5 μ m.

Maximum power = 30 mW.

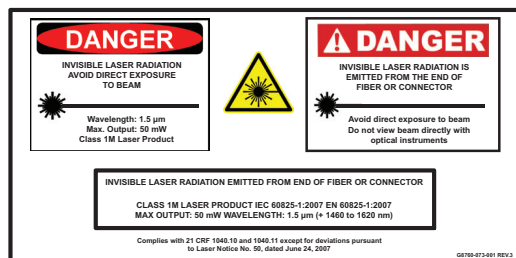

*Caution - Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

*IEC is a registered trademark of the International Electrotechnical Commission.